










Installation Manual




LS-7545B

Dear customer:
Thank you very much for choosing our company's products.
Here are the installation instructions. Please read these instructions carefully before installing.

Product Inventory


Ax1 	Bx1 	Cx1 	Dx1 	Ex2 
Fx1 	Gx1 	Hx1 	Kx1 	

2

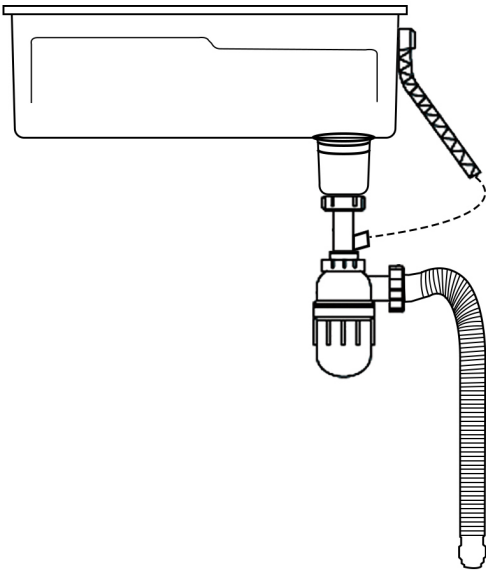

1


Hole size on the counter top

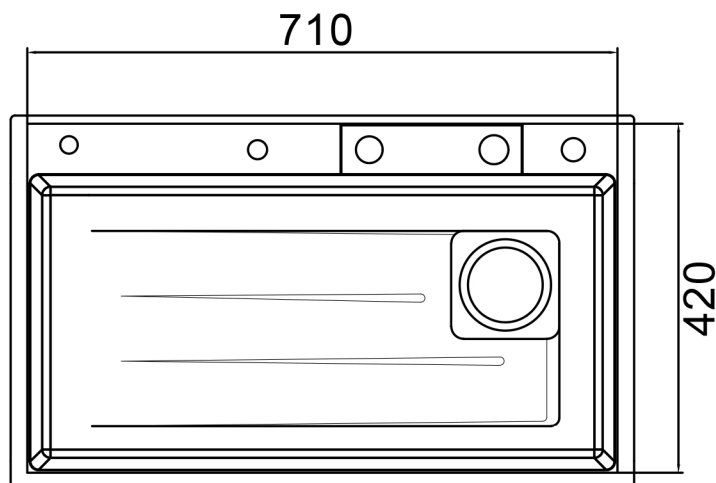

Measure the kitchen countertop to ensure that there is enough space left, and then open the hole according to the figure above.

2

Product Details

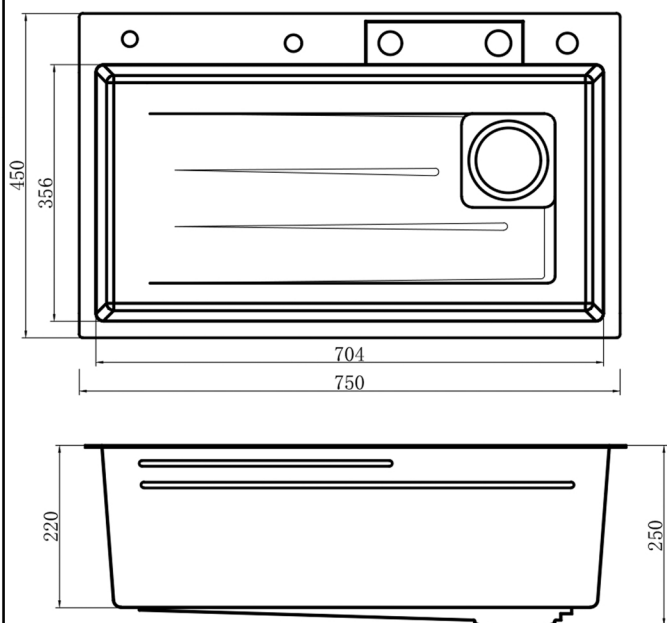

External measure 750x450mm

Bowls measure 704x356mm

Depth 220mm

Package Individual Box

Draw the kitchen sink faucet

Before installation

All information is compiled according to the latest published product information. The company reserves the right to change the characteristics, packaging or type of product available at any time without notice.

The manual contains important information on installation, maintenance and cleaning. Please provide this information for users to read.

Points to note


1. Be sure to flush the water supply pipe thoroughly to remove impurities from the pipe.
2. If it installs the new washbasin, may install the faucet first to the washbasin.
3. Maximum working pressure: 0.5 MPA (5 bar) . Pressure relief valve must be installed when water pressure exceeds 0.5 mpa (5 bar) . The highest working temperature and ambient temperature of shower: 60°C . Please pay special attention to the arm tube connected with the shower should be away from the heater, otherwise it may damage the shower and its seals, or even harm the users.

Instructions for use


Handwheel switch turn left for main faucet: turn right cold water-mixed hot water, return to the middle for closing;

Handwheel switch turn right for rainfall: turn to the left cold water-mixed hot water, return to the middle for closing


Installation dimensions

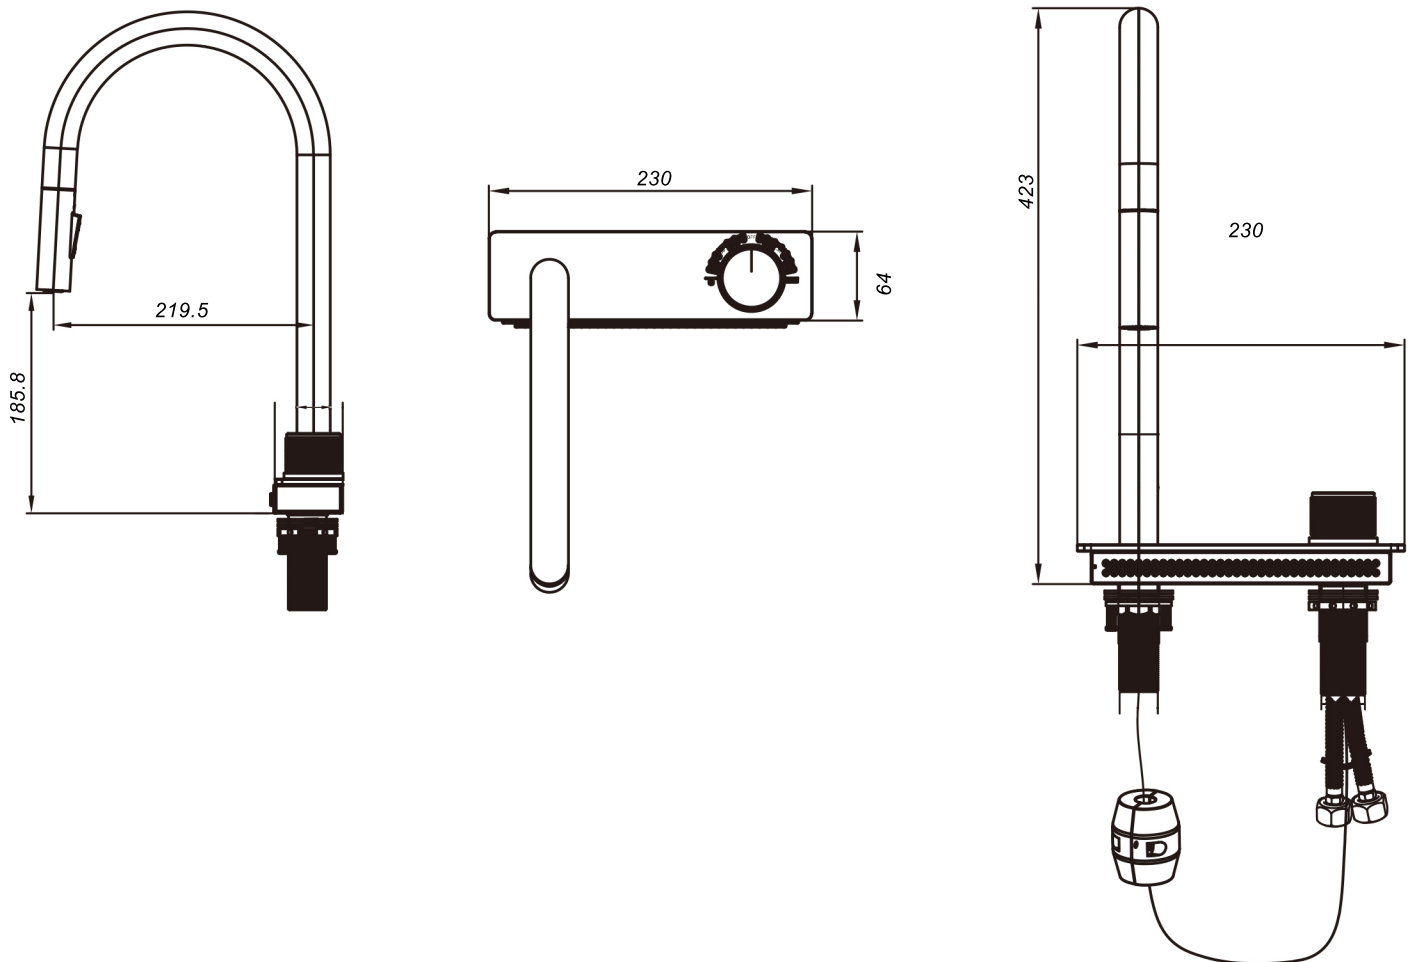


Installation steps

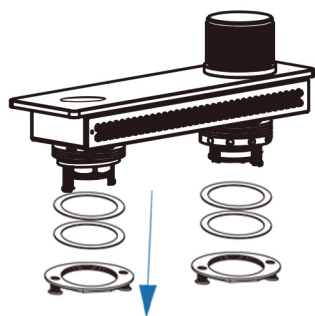

1. Rotary plastic washers and metal washers, remove them from the tooth tube.


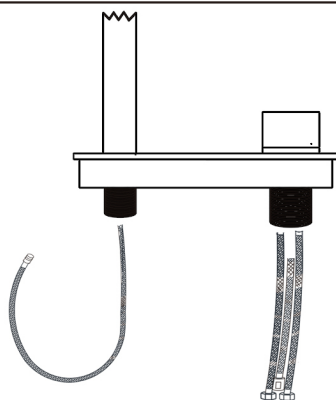


2. Assemble the flexible hoses on the bottom of faucet body.

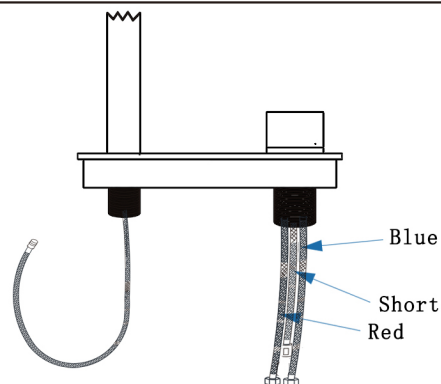


3. Pay attention to the installation position of hot and cold water pipes.


4. Place the hose into the designated hole

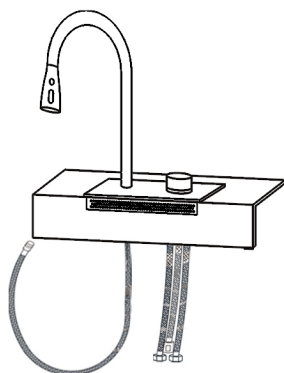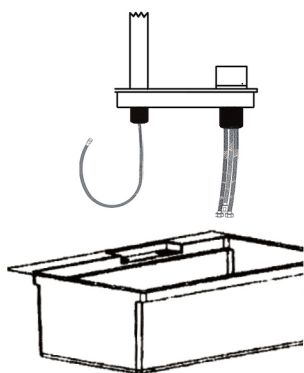


5. Put the faucet body on the appointed hole of the sink

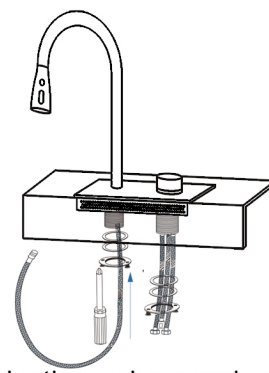


6. Fix the plastic washers and metal washers removed in the first step to the corresponding positions with screws.

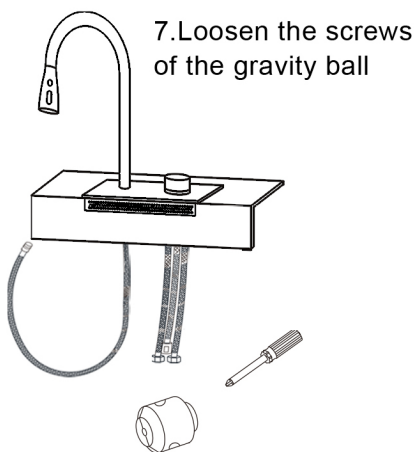


7. Loosen the screws of the gravity ball

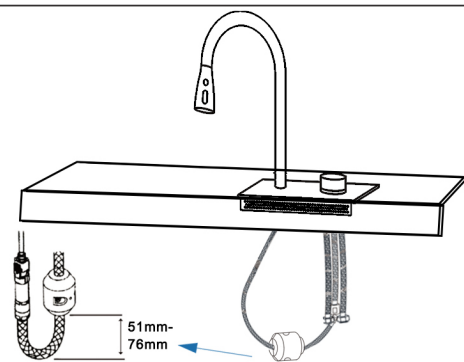


8. Fix the gravity ball on the pull hose then connect the quick hose, adjust the gravity ball to a suitable position and lock it.

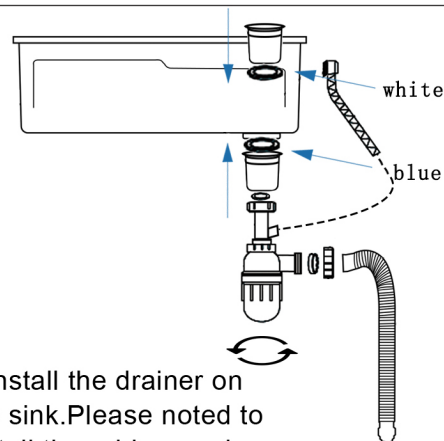


9. Install the drainer on the sink. Please noted to install the rubber seals on the connecting parts.

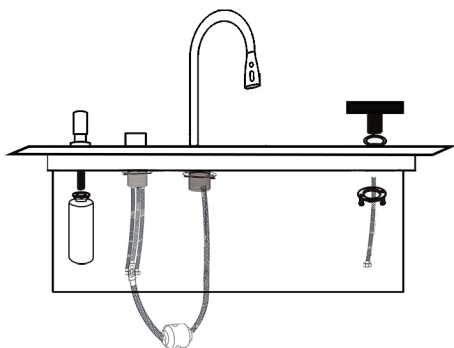

10. Install the dispenser, and cup washer on the sink then put the whole set of sink on the counter top.

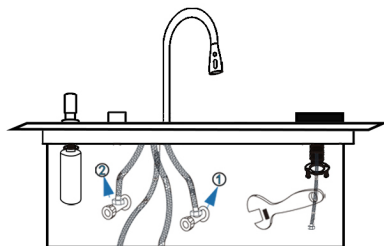


11. Connect the cold and hot water pipe with the kitchen water inlet holes. The inlet pipe of the cup washer can be directly connected to the kitchen inlet or connected to the cold water inlet of the faucet with a three-way angle valve according to the actual situation.

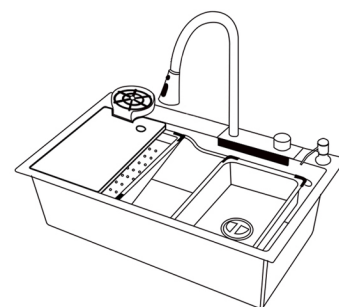


12. Install other accessories like cutting board, small sink and dryer, test them if they are fitting and moving well. Meanwhile test the faucet to see if it is working well.

Soap dispenser installation


1 Soap dispenser hole




2 Screw the cap meson into the soap dispenser head and tighten




3 Screw on the PP plastic bottle body



4 Pour soap or hand sanitizer into the soap dispenser




5 Put in the indenter, press down, you can rest assured to use




Use Strategy


- Handwheel switch turn right for main faucet: turn right cold water-mixed hot water, return to the middle for closing;
- Handwheel switch turn right for rainfall: turn to the left cold water-mixed hot water, return to the middle for closing

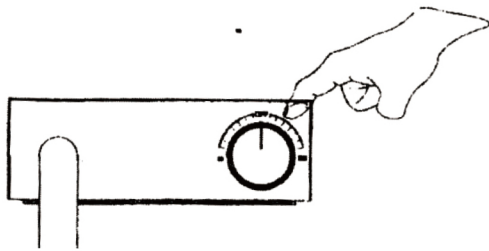


- Free draw of the draw head

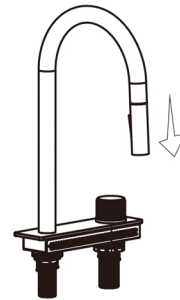


- Press to switch the showerspray

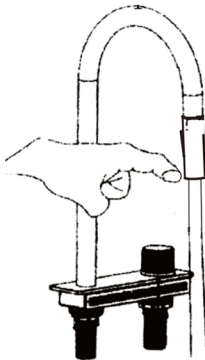

- Press to change the water outlet methods

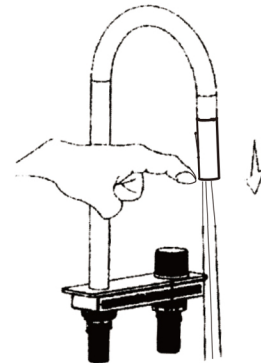

- Faucet maintenance: 1. Turn on the faucet and rub the nozzle to remove impurities.

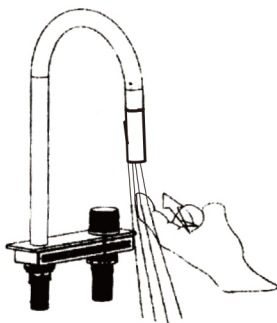

- 2. When there are impurities to make water flow small, remove the head of the shower frother, cleaning the frother. Just put it back on.



(Check for installation results)

(Check and make sure all joints are tight and the handwheel is in the closed position. Open the main faucet and drainage system. Inspect and repair leaky connections.)

(Cleaning instructions)

(Apply to all processed surfaces; clean the coated surface with neutral soapy water, then thoroughly wipe the entire surface with a clean soft cloth, many detergents, such as ammonia, detergent and toilet cleaner, etc., will cause damage to the plating surface, do not use. Abrasive cleaning appliances or detergents should not be used with faucets and their accessories.)